POL-EKO
Perfect Environment

(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

Data sheet

Cooled Incubator (ST)
ST 700 Smart



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART controller:
- 4,3”, clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on

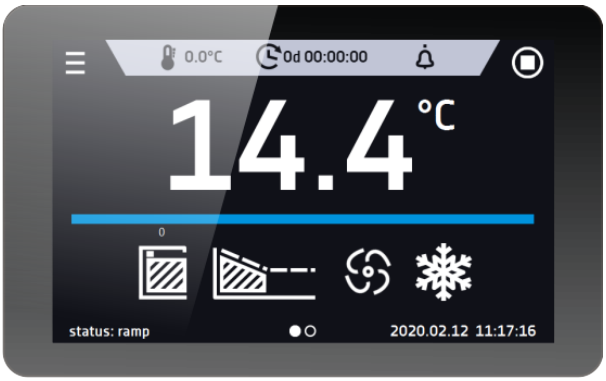

Smart - preview screen

(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

TECHNICAL DATA	
air convection	forced
chamber capacity [l]	625
working capacity [l]	611
controller	microprocessor PID
display	4,3" full colour touch screen
TEMPERATURE	
temperature range [°C]	+3...+40 / +70 (opcja)
temperature resolution every ... [°C]	0,1
temperature fluctuation at 37°C [+/-°C]*	0,3
temperature variation at 37°C [+/-°C]*	1,0
temperature protection	class 1.0 to DIN 12880 / class 3.3 (option)
CHAMBER	
door type	solid / glass or double (option) /4/
interior	
B Smart	aluminium
C Smart	stainless steel to DIN 1.4016
CS Smart	stainless steel to DIN 1.4016
P Smart	acid-proof stainless steel to DIN 1.4301
PS Smart	acid-proof stainless steel to DIN 1.4301
housing	
B Smart	powder coated sheet
C Smart	powder coated sheet
CS Smart	stainless steel polished
P Smart	powder coated sheet
PS Smart	stainless steel polished

overall dims [mm] /1/	
width A	730
height B	1990
depth C	960
internal dims [mm]	
width D	540
width D'	600
height E	1510
depth F	680
height I	1380

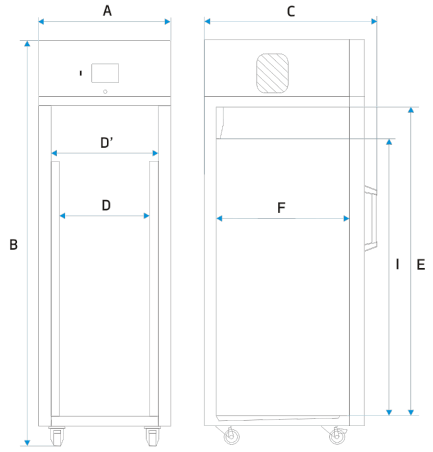

shelves (standard | max)	3 | 11
max shelf workload [kg] /2/	30
- reinforced shelf version (PW) [kg] /3/	100
max unit workload [kg]	150
weight [kg]	121

(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

ELECTRICAL PARAMETERS	
voltage**	230V 50-60Hz
nominal power [W]	650
refrigerant	R290 / GWP=3
warranty	24 months
manufacturer	POL-EKO

all the above technical data refer to standard units (without optional accessories)
* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:
K= +/- (T average max. - T average min.) / 2
** - other power supplies on request
1 - depth doesn't include 50 mm of power cable, the width does not include the 20 mm of rubber plug
2 - on uniformly loaded surface
3 - reinforced shelf
4 - additional internal glass door

OPTIONS AND ACCESSORIES

	Order number: */C	Internal glass door
	Order number: */A	External glass door
	Order number: */P	Wire shelf
	Order number: */P INOX	Stainless steel wire shelf INOX
	Order number: */PP	Perforated shelf
	Order number: */PW	Reinforced shelf
	Order number: KUW GN*/*	Stainless steel cuvettes
	Order number: ST/CHL/SWP ALU	Aluminum drawer with powder coated slides
	Order number: ST/CHL/SWP INOX	Stainless steel drawer with powder coated slides
	Order number: ST/CHL/SWPN INOX	Stainless steel drawer with stainless steel slides

(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

Order number: QLK*	Castors
Order number: ST/70	Extended temperature range to 70°C
Order number: */FOT	Photoperiodic system
Order number: GNZ	Internal socket
Order numberLabDesk	LabDesk software
Order number: BRT/*/L or IQ/OQ/PQ	Calibration and IQ, OQ, PQ qualification
Order number: */3.3	Over temperature protection 3.3 class according to DIN 12880
Order number: */RK	Chart recorder
Order number: ZKM	Magnetic door lock
Order number: BPP 12	Battery backup for display
Order number: PORT ALARM	Dry alarm contact
Order number: LANK	LAN cable
Order number: OCZ/20	Non-standard access port 20 mm
Order number: OCZ/30	Additional access port 30 mm
Order number: OCZ/60	Non-standard access port 60 mm
Order number: OCZ/100	Non-standard access port 100 mm
Order number: KD	Access control